



SF DECELL

D30[®] Decell is available for simple integration of D30[®] patented technology into product ranges.


- Optimised for moderate to high impact energies
- · Soft, flexible and versatile material
- Designed for markets where high durability is key
- Frequently used for body protection, knee and elbow pads, gloves, footwear and chin guards
- Simple integration means the product development process can be greatly accelerated.





SF DECELL SUGGESTED APPLICATIONS



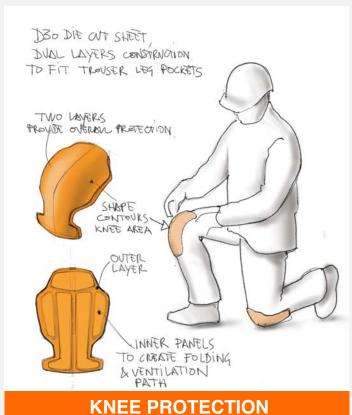

3/1



SF DECELL SUGGESTED APPLICATIONS










SF DECELL AVAILABLE THICKNESSES







SF DECELL IMPACT PROTECTION

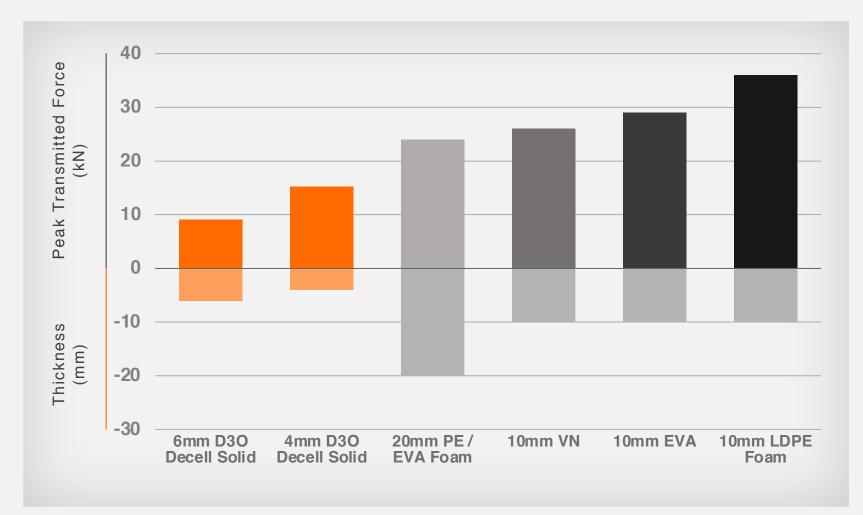

Impact Energy: 10J
The lower the Peak
Transmitted Force, the
higher the impact
protection





SF DECELL PROPERTIES

Product Name	Units	Method Reference	Decell Solid 4mm Sheet - 369 x 255mm	Decell Solid 6mm Sheet - 369 x 255mm
Product Code	-	-	11350	11217
Colour	-	-	Orange	Orange
Dimensions	mm	-	369 x 255	369 x 255
Thickness	mm	-	4	6
Weight	g	-	147	209
Material Code	-	-	SF007	SF007
Material Type	-	-	Set Foam	Set Foam
Hardness	Shore 00	ASTM D2240 - 05 (2010)	67	
Density	g/cm ³	ISO 845: 2009	0.39	0.37
Material Tensile Strength	N/mm ²	ISO 1798:2008	1.2	
Material Elongation at Break	%	ISO 1798:2008	179.9	
Material Flexural Modulus	MPa	DTS052	1.4	
Material Tensile Modulus	MPa	DTS061	0.92	
Material Water Absorbency	%	DTS028	110	
Material Accelerated ageing (heat)	%	BS EN ISO 2440:2000	3.6	
Material Accelerated ageing (humidity)	%	BS EN ISO 2440:2000	55.1	









D30

FURTHER INFORMATION

For full details including material properties and product tolerances, please request SOQ document from a D3O representative. The information provided is not intended to and does not create any warranties, expressed or implied, including any warranty of merchantability of fitness for a particular purpose. This data sheet shall not be reproduced or amended without the written consent of Design Blue Limited.

For commercial queries please visit https://www.d3o.com/contact-us

